

SHOP DRAWING NAME

TYPICAL

ARCHITECT

GENERAL CONTRACTOR

EQUIPMENT SUPPLIED BY:

TYPICAL

SPECIFICATIONS

SL-54
2 LANDING

Spectra-Lift

VERTICAL LIFT



CAR 36 1/2"x51"x42"H CODE(S) 4.5
CAPACITY 750 LBS. AT 18 F.P.M.
DRIVING MEANS: 1/2 CHAIN HYDRAULIC
SUSPENSION MEANS: TWO (2) 5/8" PITCH
LEAF CHAINS; 7500# TENSILE STRENGTH
24 VDC HYDRAULIC POWER UNIT
120 VAC BATTERY CHARGER

- ALL DOORS MUST BE INTERLOCKED
- KEYSWITCH OPERATION
- AUTO FOLD RAMP
- STATIONARY RAMP
- LANDING GATE w/ INTERLOCK
- PLATFORM GATE WITH INTERLOCK
- EMERGENCY ALARM
- EMERGENCY STOP
- MANUAL LOWERING
- PLATFORM SAFETY MECHANISM
- INSTANT REVERSE
- LIMIT SWITCHES
- ENCLOSURE DOORS BY INCDA
- ENCLOSURE BY INCDA


NOTICE TO ELECTRICAL CONTRACTOR:
INSTALL 120V. SINGLE PHASE
DISCONNECT SWITCH
120 VAC SINGLE PHASE
50/60 HZ
15 AMP MAIN LINE FUSE

INCDA JOB #
DEALER P.O. #
DRAWING BY:
DATE:

DRAWING IDENTIFICATION NUMBER

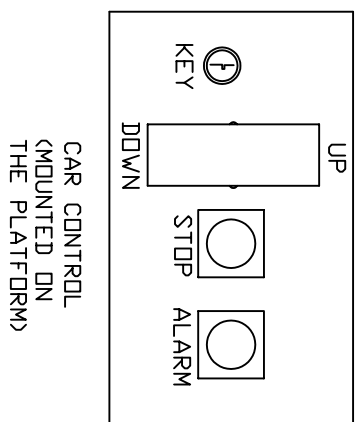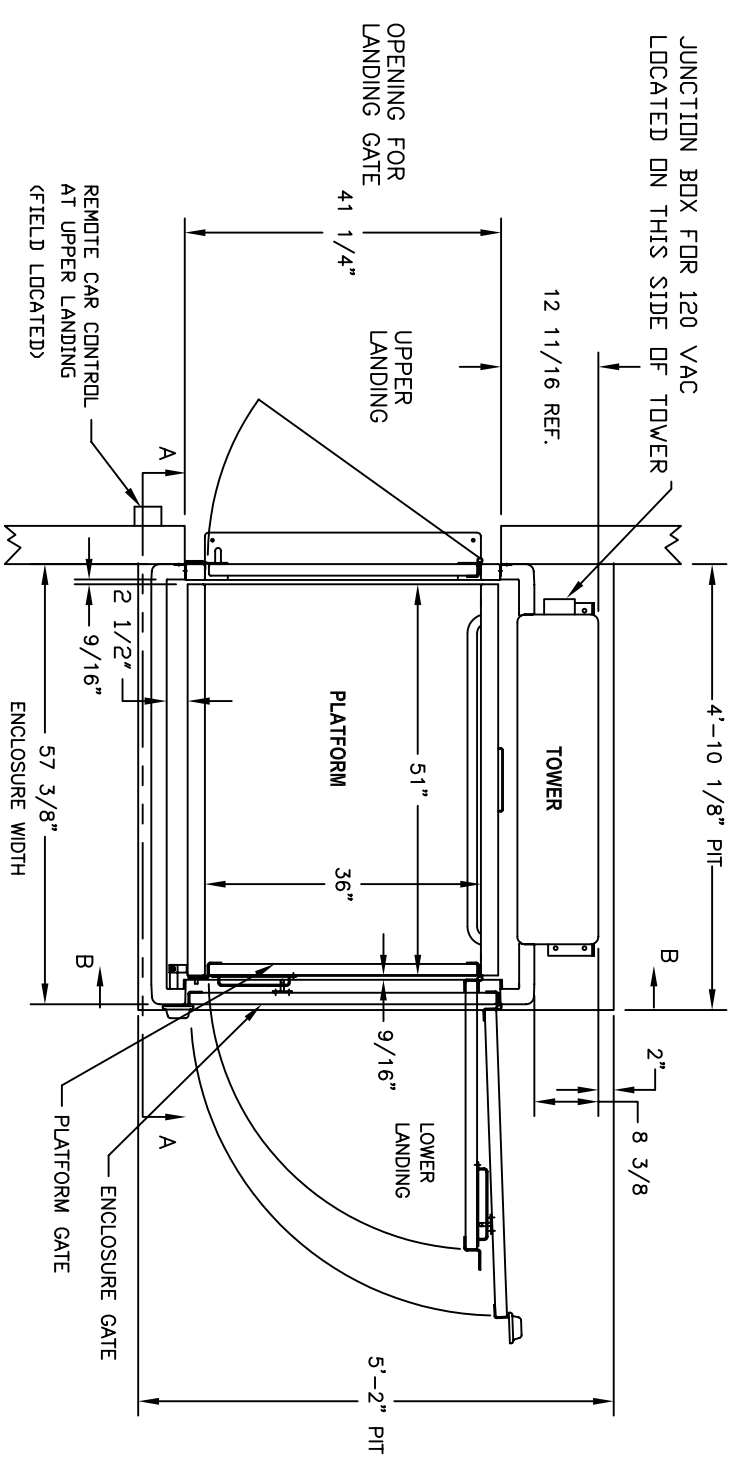


CAR CONTROL
(MOUNTED ON
THE PLATFORM)



CAR CONTROL
(USES A STD. SIZE
SURFACE MOUNT BOX
SUPPLIED BY INCDA)

KEYED DISCONNECT SWITCH SUPPLIED
FOR DISCONNECTING 24 VDC POWER
MOUNTED ON TOWER

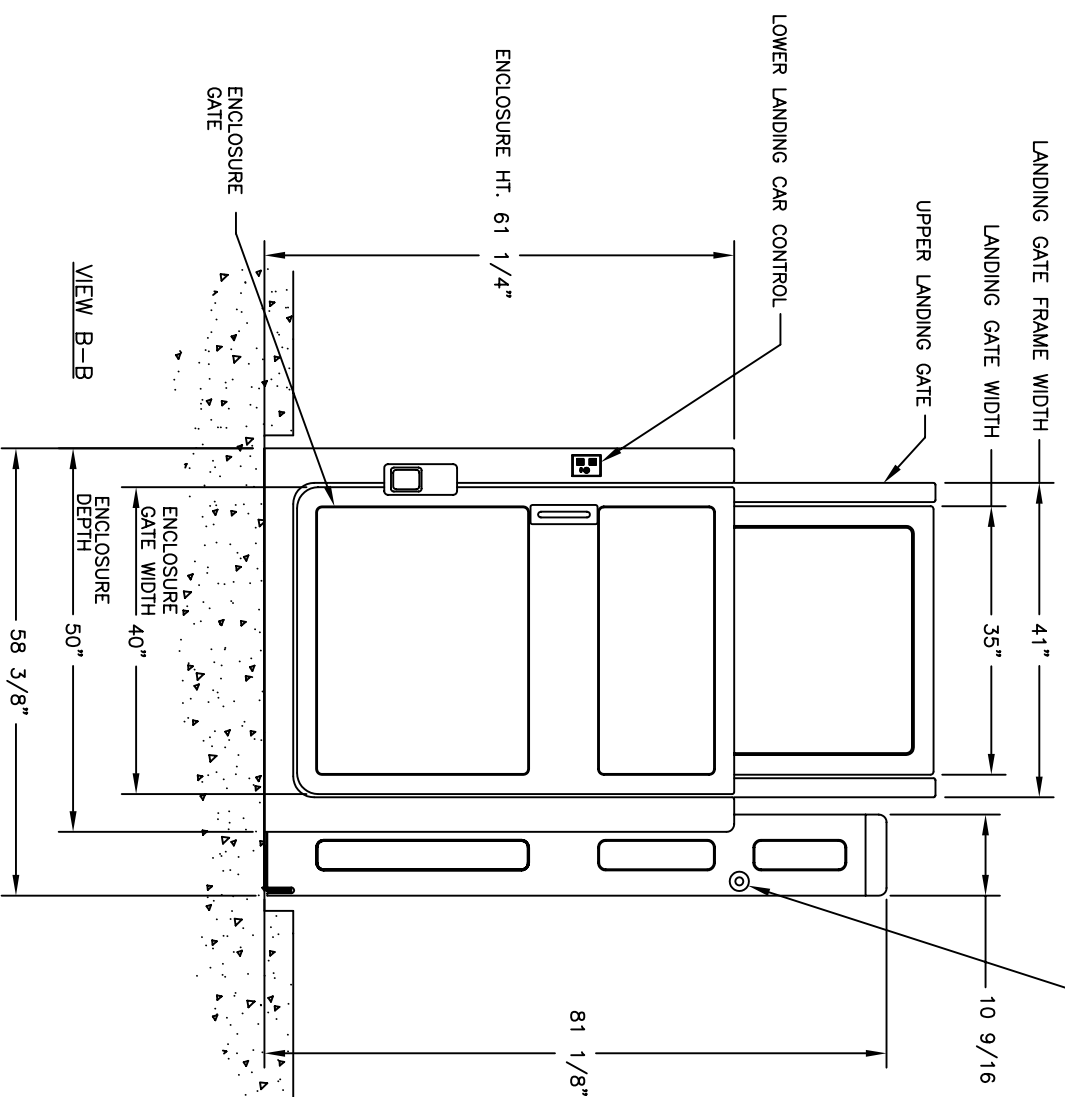

VIEW B-B

NOTE:
FLOOR LOAD @ CAPACITY:
STATIC - 1965 lbs.
DYNAMIC - 3415 lbs.

VIEW A-A
CONCRETE PAD - 4" MIN. THICKNESS
3500 PSI CONCRETE (MIN)
SURFACE TO HAVE A SMOOTH TROWEL FINISH
FREE OF HOLLOW OR BUMPS.
SURFACE TO BE LEVEL (0% SLOPE), AND FLAT
TO WITHIN ±1/8" IN ANY DIRECTION.

ALL DIMENSIONS ARE IN INCHES